



## VEHICLE OVERVIEW

N/A  
OCTOBER 3, 2023

### **MX 660** MODEL VACUUM TRUCK

## A low maintenance vehicle that keeps things clean.

As a vacuum truck, the MX-660 is hard to beat: It has a long deck with a 500-gallon vacuum tank, electric vacuum pump motor with 10 in.Hg continuous / 15 in.Hg intermittent vacuum performance, top mounted strainer basket, drop hose (2" x 25" long), 2" sch 40 rear pipe outlet with kamlock ball valve, and much more. With our option packages, it quickly becomes a potable water tank or high-pressure washing tank carrier. In fact, with its unlimited configurations, this zero-emission vehicle can adapt to virtually any application.



#### Custom Vehicles, Utility Vehicles

Other Models : Vacuum Truck IC

 PASSENGERS  
2

 LOAD CAPACITY  
4,000 lbs




 TOWING CAPACITY  
n/a

 SPEED MPH  
8 mph

 TURNING RADIUS  
184"

#### FEATURES

- Built-to-last all-steel unibody construction
- Heavy-duty powder paint & protection
- Smooth-ride wheels in multiple models and options
- Heavy-duty braking power
- Inboard / portable high frequency PFC battery charger\*

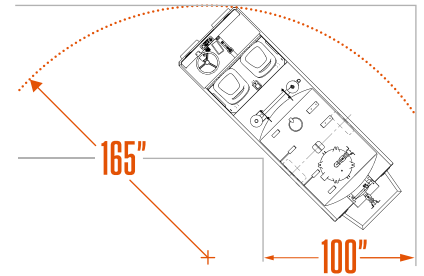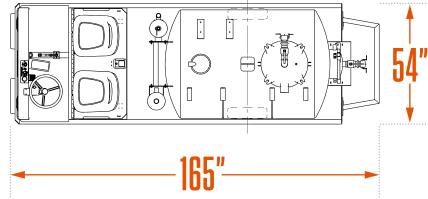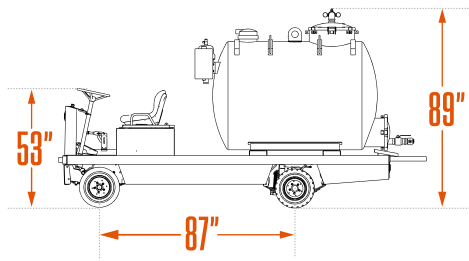

## Dimensions

### VEHICLE

Height	102"	2,591 mm
Length	183"	4,648 mm
Width	54"	1,372 mm
Wheel Base	116"	2,946 mm
Ground Clearance	3"	76 mm

### DECK

Height	25"	635 mm
Width	54"	1,372 mm
Length	113"	2,870 mm

### UNIT WEIGHT

With Batteries	7,400 lbs	3,357 kg
Without Batteries	6,456 lbs	2,928 kg

### BATTERIES

Height	14.5"	368 mm
Length	28.8"	730 mm
Width	19.1"	486 mm
Weight - Min	n/a	n/a
Weight - Max	150 lbs	68 kg

## Performances

### VEHICLE

Passengers	2	
Load Capacity	4,000 lbs	1,814 kg
Tow Capacity	n/a	n/a
Drawbar Pull - Normal	n/a	n/a
Drawbar Pull - Ultimate	n/a	n/a
Speed MPH	8 mph	13 km/h
Turning Radius	184"	4,674 mm

## Specifications

### POWERTRAIN

Motor	15 hp
Controller	Electronic solid state
Drive Axle	Automotive differential
Brakes	Hydraulic disc brakes on front & rear
Wheels	19" Rib solid tire on front & 19" traction solid tire on rear
Transmission	SYNCHRO BELT
Suspension	Front and rear leaf springs
Starter	n/a
Clutch	n/a
Engine	n/a

### ENERGY

Voltage	48 Volt
Battery	Eight 6V-420AH batteries
Charger	High-Frequency Charger, improves battery performance, prevents current surge, 50/60HZ, 110/220VAC
Alternator	n/a
Fuel	n/a

### CHASSIS

Body	All-steel unibody construction. Powder Coating.
Color	Security orange or federal yellow
Lights	LED dual headlights & tail/brake lights, dual back-up lights

### OPERATOR COMPARTMENT

Steering	Automotive steering wheel with angled steering column
Seats	Two bucket seats on slide adjusters
Indicators	Digital battery indicator with hour meter
Safety	Deadman seat switch, reverse alarm, horn
Accessories	Digital battery indicator, hour meter, 48V/12VDC converter, bolt-on front bumper

## Standards

n/a

Vehicle shown may have optional accessories and is provided for illustrative purposes only.

Specifications and standard equipment are subject to change without notice.

---

n/a

**n/a**  
n/a  
n/a  
n/a  
n/a  
n/a

**n/a**  
n/a  
n/a  
n/a n/a  
n/a



[www.motrec.com](http://www.motrec.com)